

Kap Ø145 Wall-Washer Dali

 03.4475.GLCDA - Gold


Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

Main specifications

Number of heads	1	Net lumen (lm)	871
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	17W	Environment	Indoor
CCT (K)	3000K		
CRI	98		

Optical

Lighting type	Indirect, Direct
LED type	Phosphor LED
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	56
Beam angle C90-270 (°)	60
Efficiency (lm/W)	51



Beam Angle: 56°

h(m)	E(lx)	D(m)
1	878	1.18
2	219	2.37
3	98	3.55
4	55	4.73
5	35	5.92

Luminous flux luminaire
871 lm (EXTREME CUT OFF)

Electrical



Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	18.40	Insulation class	II
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic dimmable DALI		

Physical


Color	Gold
Orientation	Fixed
Weight (kg)	0.94
Spot diameter (mm)	145

Note


Pre-installation frame. To be ordered separately.

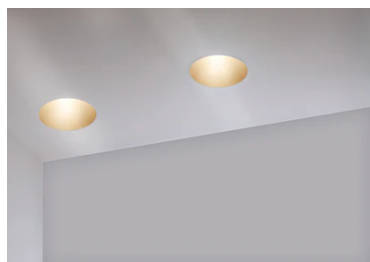

*NO TRIM
**TRIM



Kap Ø145 Wall-Washer Dali



Installation Frame Trim
08.8491.BU

Installation Frame Trim
08.8491.14

Installation Frame No Trim
08.8251.00



Installation Frame Trim
08.8491.30

Installation Frame Trim
08.8491.GL