




Kap Ø50 Adjustable Optic Medium

■ 05.7316.BU - Blue

Recessed luminaire with LED light source. Power supply not included. Remote power supply to be installed in an accessible place.

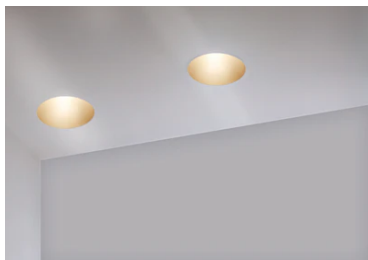


Main specifications

Number of heads	1	Net lumen (lm)	475
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	7.5W	Environment	Indoor
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	24
Beam angle C90-270 (°)	24
Efficiency (lm/W)	55



Beam Angle: 24°

h(m)	E(lx)	D(m)
1	2149	0.42
2	537	0.84
3	239	1.26
4	134	1.67
5	86	2.09

Luminous flux luminaire
475 lm (EXTREME CUT OFF)

Electrical

Voltage (V)	35	Emergency	Without
Current (mA)	200	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		

Physical

Color	Blue	Rotation (°)	360
Orientation	Adjustable	Spot diameter (mm)	54
Recessed depth (mm)	100		
Weight (kg)	0,162		
Tilt (°)	20		

Note

Pre-installation frame. To be ordered separately.

Kap Ø50 Adjustable Optic Medium



Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200mA – 8,5W / 250mA – 11W / 300mA – 13W / 350mA – 15W / 400mA – 17,5W / 450mA 19,5W / 500mA – 22W.
60.9160

Continuous current power supply dimmable 0-10V. 20W
60.9483

Continuous current power supply dimmable DALI 220/240V – 50/60Hz. 20W – 200 mA.
60.9604



Casambi Controller 220-240V. Remote Installation
60.9392

Continuous current power supply. 220/240V – 50/60Hz. Adjustable Current 150 mA – 7,2W / 200 mA – 9,5W / 250 mA – 12W / 300 mA -14,5W / 350 mA -17W/400 mA – 19,5W / 450 mA -21,5W / 500 mA – 24W. Mains or push dimming
60.9421

Installation frame No Trim
08.9114.00