



## Kap Ø50 Adjustable Optic Spot

■ 05.7315.BU - Blue

Recessed luminaire with LED light source. Power supply not included. Remote power supply to be installed in an accessible place.

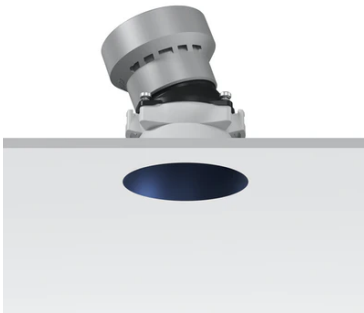


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	565
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	7.5W	<b>Environment</b>	Indoor
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	LED array
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Spot
<b>Beam angle (°)</b>	15
<b>Beam angle C90-270 (°)</b>	15

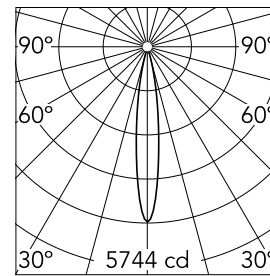

<b>Beam Angle:</b>	15°	
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>
1	5744	0.26
2	1436	0.52
3	638	0.78
4	359	1.04
5	230	1.30

Luminous flux luminaire  
565 lm (EXTREME CUT OFF)

### Electrical

<b>Voltage (V)</b>	35	<b>Emergency</b>	Without
<b>Current (mA)</b>	200	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote		
<b>Driver type</b>	Electronic, Electronic dimmable, Electronic dimmable 1-10V, Electronic dimmable DALI		

### Certification / Marking



### Physical

<b>Color</b>	Blue	<b>Rotation (°)</b>	360
<b>Orientation</b>	Adjustable	<b>Spot diameter (mm)</b>	50
<b>Recessed depth (mm)</b>	100	<b>Length (mm)</b>	54
<b>Weight (kg)</b>	0,162		
<b>Tilt (°)</b>	20		

## Kap Ø50 Adjustable Optic Spot



---

Power supply non dimmable.  
Multicurrent 125-500mA; 5,5-22W  
60.9160

---

Continuous current power supply  
dimmable 0-10V. 20W  
60.9483

---

Continuous current power supply  
dimmable DALI 220/240V – 50/60Hz.  
20W – 200 mA.  
60.9604



---

Casambi Broadcast. Remote Installation  
60.9392

---

Continuous current power supply of  
7,2-24W, 220/240V – 50/60Hz  
60.9421