




## Kap Ø80 Adjustable Optic Flood - Dim-To-Warm

■ 03.4540.BU.LE - Blue

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

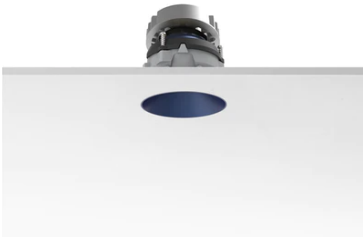


### Main specifications

Number of heads	1	Net lumen (lm)	619
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13W	Environment	Indoor
CCT (K)	2850K-1800K		
CRI	95		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	54
Beam angle C90-270 (°)	54
Efficiency (lm/W)	47

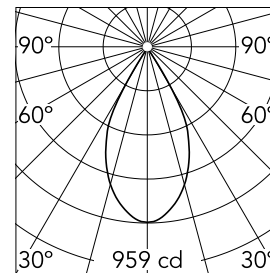

Beam Angle: 54°

h(m)	E(lx)	D(m)
1	959	1.01
2	240	2.02
3	107	3.03
4	60	4.04
5	38	5.05

Luminous flux luminaire  
619 lm (EXTREME CUT OFF)

### Electrical

Frequency (Hz)	50/60	Driver type	Electronic dimmable 1-10V
Voltage (V)	33.00	Emergency	Without
Current (mA)	300	Insulation class	II
Dimmable	Yes		
Driver	Remote		

### Physical

Color	Blue	Rotation (°)	360
Orientation	Adjustable	Spot diameter (mm)	74
Recessed depth (mm)	91		
Weight (kg)	0.24		
Tilt (°)	20		

### Note

For 110V PSU versions, please consult with the front office. Diffusing lens included.

## Kap Ø80 Adjustable Optic Flood - Dim-To-Warm



---

Installation frame No Trim  
08.9102.00