



Kap Ø80 Adjustable Optic Spot - Dim-To-Warm

■ 03.4538.BU.LE - Blue

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

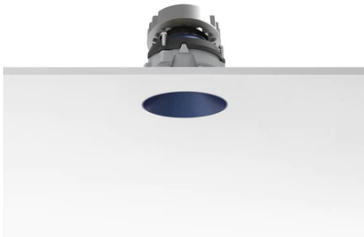


Main specifications

Number of heads	1	Net lumen (lm)	639
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13W	Environment	Indoor
CCT (K)	2850K-1800K		
CRI	95		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	17
Beam angle C90-270 (°)	18
Efficiency (lm/W)	49

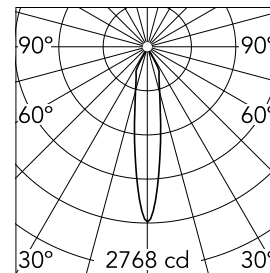

Beam Angle:	17°		
h(m)	E(lx)	D(m)	
1	2768	0.31	
2	692	0.61	
3	308	0.92	
4	173	1.22	
5	111	1.53	

Luminous flux luminaire
639 lm (EXTREME CUT OFF)

Electrical


Frequency (Hz)	50/60	Driver type	Electronic dimmable 1-10V
Voltage (V)	33.00	Emergency	Without
Current (mA)	300	Insulation class	II
Dimmable	Yes		
Driver	Remote		

Physical

Color	Blue	Rotation (°)	360
Orientation	Adjustable	Spot diameter (mm)	74
Recessed depth (mm)	91		
Weight (kg)	0.24		
Tilt (°)	20		

Note

For 110V PSU versions, please consult with the front office. Diffusing lens included.



Kap Ø80 Adjustable Optic Spot - Dim-To-Warm



Installation frame No Trim
08.9102.00