



## Kap Ø80 Fixed Optic Spot - Dim-To-Warm

■ 03.4530.BU.LE - Blue

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

Recessed luminaire with LED light source. 220-240V & dimmable 1-10V power supply included.

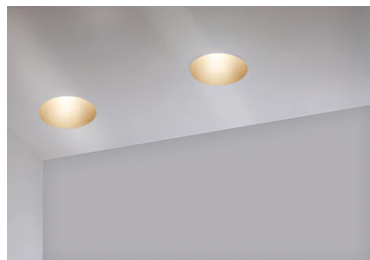


### Main specifications

|                 |             |                |                  |
|-----------------|-------------|----------------|------------------|
| Number of heads | 1           | Net lumen (lm) | 644              |
| Lamp category   | LED         | Mountings      | Ceiling recessed |
| Power (W)       | 13W         | Environment    | Indoor           |
| CCT (K)         | 2850K-1800K |                |                  |
| CRI             | 95          |                |                  |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | LED array |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 19        |
| Beam angle C90-270 (°) | 19        |
| Efficiency (lm/W)      | 49        |



Beam Angle: 19°

|   | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 2703 | 0.33  |      |
| 2 | 676  | 0.66  |      |
| 3 | 300  | 0.99  |      |
| 4 | 169  | 1.32  |      |
| 5 | 108  | 1.65  |      |

Luminous flux luminaire  
644 lm (EXTREME CUT OFF)

### Electrical


|                |        |                  |                           |
|----------------|--------|------------------|---------------------------|
| Frequency (Hz) | 50/60  | Driver type      | Electronic dimmable 1-10V |
| Voltage (V)    | 33.00  | Emergency        | Without                   |
| Current (mA)   | 300    | Insulation class | II                        |
| Dimmable       | Yes    |                  |                           |
| Driver         | Remote |                  |                           |

### Physical

|                     |       |
|---------------------|-------|
| Color               | Blue  |
| Orientation         | Fixed |
| Recessed depth (mm) | 91    |
| Weight (kg)         | 0.24  |
| Spot diameter (mm)  | 74    |

### Note

For 110V PSU versions, please consult with the front office. Diffusing lens included.



## Kap Ø80 Fixed Optic Spot - Dim-To-Warm



---

Installation frame No Trim  
08.9102.00