




## Kap Ø80 Plus Wall-Washer

■ 05.7421.74 - Black

Recessed luminaire with LED light source. Power supply not included. Elliptical lens included.

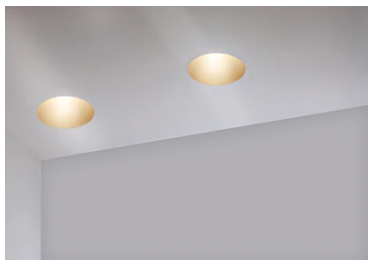


## Main specifications

Number of heads	1	Net lumen (lm)	806
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	13.4W	Environment	Indoor
CCT (K)	2700K		
CRI	90		

## Optical

Lighting type	Direct
LED type	LED array
Light distribution	Asymmetric
Optical type	Wall-washer
Beam angle (°)	26
Beam angle C90-270 (°)	27
Efficiency (lm/W)	60

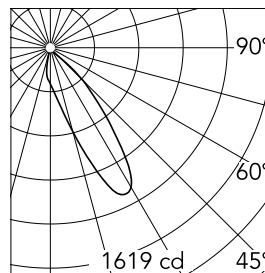

Beam Angle: 26°

h(m)	E(lx)	D(m)
1	1619	0.59
2	405	1.19
3	180	1.78
4	101	2.37
5	65	2.97

Luminous flux luminaire  
806 lm (EXTREME CUT OFF)

## Electrical

Voltage (V)	17,8	Emergency	Without
Current (mA)	700	Insulation class	III
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic, Electronic dimmable, Electronic dimmable 1- 10V, Electronic dimmable DALI		

## Physical

Color	Black
Orientation	Fixed
Recessed depth (mm)	150
Weight (kg)	0,241
Spot diameter (mm)	74

# Kap Ø80 Plus Wall-Washer



Installation frame No Trim  
08.9102.00



Non dimmable continuous current power supply. 15-30W, 220/240V -50/60Hz with power current selected through adjustable switch.  
60.9592



Continuous current power supply of 13-20W, 110\*/240V – 50/60Hz with power current selected through adjustable switch. 1-10V or push dimming.  
60.9188



Constant Current Power Supply for LED. Dimmable DALI. 10-20W  
60.8847



Continuous current power supply of 12-20W, 110\*/240V – 50/60Hz with power current selected through adjustable. Regurable DALI 1 y DALI 2  
60.9222



Continuous current power supply, Mains dimming 220/240V – 50/60Hz, 12-20W  
60.9467



50/60Hz, 35W – 650mA / 36W – 700 mA.  
60.9207