



## Kap Suspension Ø 100

03.5811.ASB - Brushed Aluminium/Gold


Hanging luminaire for mounting in ceiling with led light source. non-regulable 110/240V, 50/60hz power supply integrated in luminaire body.

### Main specifications

Number of heads	1	CRI	80
Lamp category	LED	Net lumen (lm)	498
Power (W)	9W	Mountings	Suspension
System power (W)	11W	Environment	Indoor dry location
CCT (K)	3000K		


### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	29
Beam angle C90-270 (°)	29

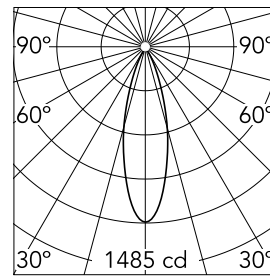

Beam Angle:	29°		
	h(m)	E(lx)	D(m)
1	1485	0.52	
2	371	1.05	
3	165	1.57	
4	93	2.09	
5	59	2.62	

Luminous flux luminaire  
498 lm (EXTREME CUT OFF)

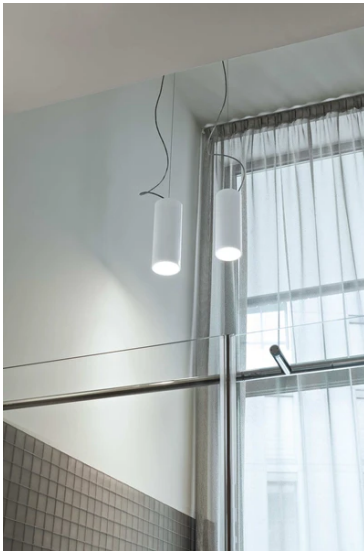

### Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	110/240	Insulation class	I
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		

### Physical

Color	Brushed Aluminium/Gold
Weight (kg)	2.27
Spot diameter (mm)	100
Length (mm)	100

