


LED Curtain 300 mm

03.3901.30C - White


Recessed luminaire for direct lighting with LED. Elliptical lens 12°x48° incorporated. Remote transformer not included

**Main specifications**

| | | | |
|-----------------------|-------|--------------------|------------------|
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 8.7W | Environment | Indoor |
| CCT (K) | 3000K | | |
| CRI | 90 | | |
| Net lumen (lm) | 453 | | |

Optical

| | |
|-------------------------------|--------------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Accent light |
| Beam angle (°) | 13 |
| Beam angle C90-270 (°) | 53 |



Beam Angle: 53°

| | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 1221 | 0.23 | |
| 2 | 305 | 0.46 | |
| 3 | 136 | 0.69 | |
| 4 | 76 | 0.92 | |
| 5 | 49 | 1.15 | |

Luminous flux luminaire
453 lm

Electrical


| | | | |
|-----------------------|------------|-------------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 24.00 | Insulation class | III |
| Dimmable | No | | |
| Driver | Remote | | |
| Driver type | Electronic | | |

Physical

| | |
|--------------------|-------|
| Color | White |
| Orientation | Fixed |
| Weight (kg) | 0.60 |
| Length (mm) | 300 |

Note


6 LEDs.

Certification / Marking

LED Curtain 300 mm



Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W
60.8703

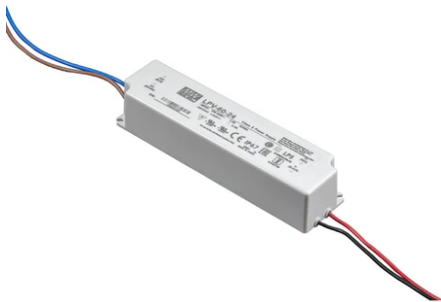


Electronic Transformer 60W
60.8496



Electronic Transformer 100W
60.8497



Connection cable L: 100 mm
06.1032.00



Connection cable L: 500 mm
06.1033.00



Power cable L: 500 mm
06.1034.00



Electronic Transformer 60W
60.8515