

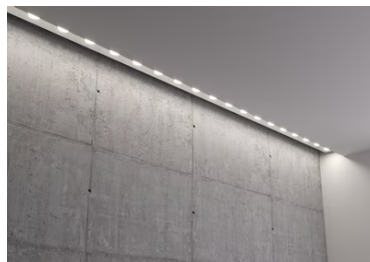


03.3903.30C - White



Lamp category	LED	Mountings	Ceiling recessed
Power (W)	26W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		
Net lumen (lm)	1360		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Accent light
Beam angle (°)	12
Beam angle C90-270 (°)	52


$$h(m) \quad E(lx) \quad D(m)$$

1	3662	0.23
2	916	0.46
3	407	0.69
4	229	0.92
5	146	1.15

Luminous flux lumineaire  
1360 lm

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	24.00	Insulation class	III
Dimmable	No		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable 1- 10V, Dimmable DALI 1		

Color	White
Orientation	Fixed
Weight (kg)	1.80
Length (mm)	900

18 LEDs.

## LED Curtain 900 mm



Electronic transformer with constant voltage (24V) for LED. 60W. 100/240V. For independent use  
60.8515



Electronic transformer with constant voltage (24V) for LED. 100/240V. 25W  
60.8703



Dimmable 1-10V control unit with 1 channel for 24V LED modules. Max. 120W – 5A  
60.8640



Connection cable L: 500 mm  
06.1033.00




Connection cable L: 100 mm  
06.1032.00



Electronic transformer with constant voltage (24V) for LED. 100/240V. 120W  
60.9407



Electronic transformer with constant voltage (24V) for LED. 100/240V. 60W  
60.9089

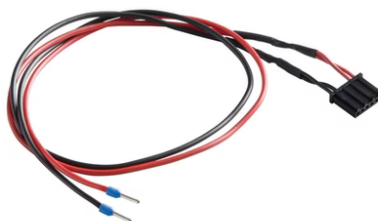

Power cable L: 500 mm  
06.1034.00



Dimmable DALI control unit with 3 channel for 24V LED modules. Power supply not included. Max. 120W – 5A.  
60.8407