


Light Shadow Adjustable No Trim 12 Spots Optic Flood

03.9467.14A - Black/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

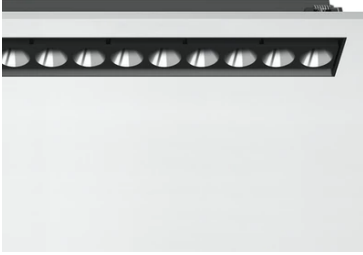


Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 2728 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 32.4W | Environment | Indoor dry location |
| CCT (K) | 2700K | | |
| CRI | 90 | | |


Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Flood |
| Beam angle (°) | 33 |
| Beam angle C90-270 (°) | 33 |

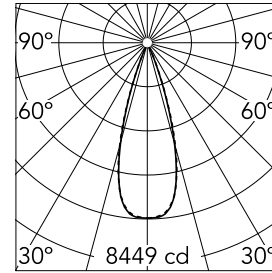

| | | |
|--------------------|--------------|-------------|
| Beam Angle: | 33° | |
| h(m) | E(lx) | D(m) |
| 1 | 8449 | 0.60 |
| 2 | 2112 | 1.19 |
| 3 | 939 | 1.79 |
| 4 | 528 | 2.38 |
| 5 | 338 | 2.98 |

Luminous flux luminaire
2728 lm (EXTREME CUT OFF)



Electrical


| | | | |
|-----------------------|-----------------|-------------------------|----|
| Frequency (Hz) | 50/60 | Insulation class | II |
| Voltage (V) | 220.00 | | |
| Dimmable | No | | |
| Driver | Remote included | | |
| Emergency | Without | | |

Physical

| | | | |
|----------------------------|--------------|--------------------|-----|
| Color | Black/Chrome | Length (mm) | 429 |
| Orientation | Adjustable | | |
| Recessed depth (mm) | 75 | | |
| Weight (kg) | 0.66 | | |
| Tilt (°) | 30 | | |

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim 12 Spots Optic Flood



Accessory for mounting of No Trim
continuous line.
08.0059.90

Pre-installation Frame
08.0518.00