



## Light Shadow Adjustable No Trim 12 Spots Optic Medium

■ 03.9461.40A - White/Black

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

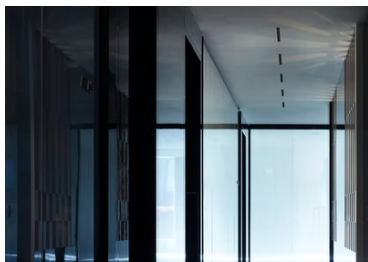


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 2698                |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 32.4W | Environment    | Indoor dry location |
| CCT (K)         | 2700K |                |                     |
| CRI             | 90    |                |                     |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Medium    |
| Beam angle (°)         | 22        |
| Beam angle C90-270 (°) | 22        |



Beam Angle: 22°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 18443 | 0.39 |
| 2    | 4611  | 0.78 |
| 3    | 2049  | 1.17 |
| 4    | 1153  | 1.56 |
| 5    | 738   | 1.95 |

Luminous flux luminaire  
2698 lm (EXTREME CUT OFF)

### Electrical


|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

### Physical

|                     |             |             |     |
|---------------------|-------------|-------------|-----|
| Color               | White/Black | Length (mm) | 429 |
| Orientation         | Adjustable  |             |     |
| Recessed depth (mm) | 75          |             |     |
| Weight (kg)         | 0.66        |             |     |
| Tilt (°)            | 30          |             |     |

### Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim 12 Spots Optic Medium



---

Accessory for mounting of No Trim  
continuous line.  
08.0059.90

---

Pre-installation Frame  
08.0518.00