


## Light Shadow Adjustable No Trim 12 Spots Optic Wide Flood

03.7380.40A - White/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

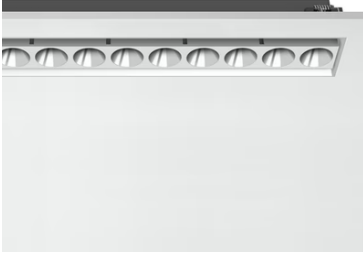


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 2830                |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 32.4W | Environment    | Indoor dry location |
| CCT (K)         | 3000K |                |                     |
| CRI             | 90    |                |                     |

### Optical

|                        |            |
|------------------------|------------|
| Lighting type          | Direct     |
| LED type               | Power LED  |
| Light distribution     | Symmetric  |
| Optical type           | Wide flood |
| Beam angle (°)         | 44         |
| Beam angle C90-270 (°) | 44         |



Beam Angle: 44°

|   | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 5900 | 0.80  |      |
| 2 | 1475 | 1.60  |      |
| 3 | 656  | 2.40  |      |
| 4 | 369  | 3.19  |      |
| 5 | 236  | 3.99  |      |

Luminous flux luminaire  
2830 lm (EXTREME CUT OFF)

### Electrical


|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

### Physical

|                     |              |             |     |
|---------------------|--------------|-------------|-----|
| Color               | White/Chrome | Length (mm) | 429 |
| Orientation         | Adjustable   |             |     |
| Recessed depth (mm) | 75           |             |     |
| Weight (kg)         | 0.66         |             |     |
| Tilt (°)            | 30           |             |     |

### Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim 12 Spots Optic Wide Flood



---

Accessory for mounting of No Trim  
continuous line.  
08.0059.90

---

Pre-installation Frame  
08.0518.00