



### Light Shadow Adjustable No Trim 2 Spots Optic Medium

03.9402.14A - Black/Chrome

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

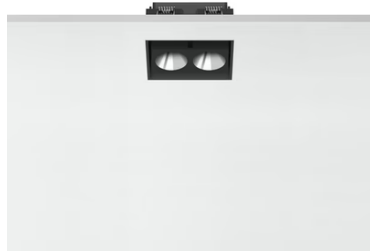


#### Main specifications

Number of heads	1	Net lumen (lm)	453
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	5.4W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

#### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	22
Beam angle C90-270 (°)	22

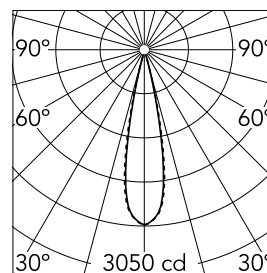

Beam Angle: 22°

h(m)	E(lx)	D(m)
1	3050	0.39
2	763	0.77
3	339	1.16
4	191	1.55
5	122	1.94

Luminous flux luminaire  
453 lm (EXTREME CUT OFF)

#### Electrical

Frequency (Hz)	50/60	Insulation class	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

#### Physical

Color	Black/Chrome	Length (mm)	79
Orientation	Adjustable		
Recessed depth (mm)	150		
Weight (kg)	0.25		
Tilt (°)	30		

#### Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim 2 Spots Optic Medium



---

Pre-installation Frame  
08.0515.00

---

Accessory for mounting of No Trim  
continuous line.  
08.0059.90