



### Light Shadow Adjustable No Trim 2 Spots Optic Spot

03.8921.14A - Black/Black

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

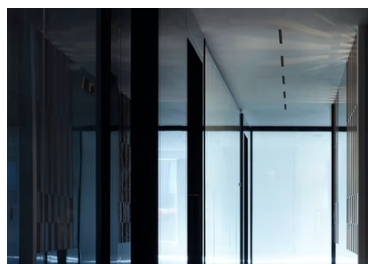


#### Main specifications

Number of heads	1	Net lumen (lm)	458
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	5.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

#### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10

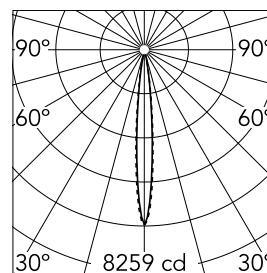

Beam Angle:	10°		
h(m)	E(lx)	D(m)	
1	8259	0.18	
2	2065	0.36	
3	918	0.54	
4	516	0.72	
5	330	0.90	

Luminous flux luminaire  
458 lm (EXTREME CUT OFF)

#### Electrical

Frequency (Hz)	50/60	Insulation class	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

#### Physical

Color	Black/Black	Length (mm)	79
Orientation	Adjustable		
Recessed depth (mm)	150		
Weight (kg)	0.25		
Tilt (°)	30		

#### Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim 2 Spots Optic Spot



---

Pre-installation Frame  
08.0515.00

---

Accessory for mounting of No Trim  
continuous line.  
08.0059.90