Light Shadow Adjustable No Trim 2 Spots Optic Wide Flood

03.7350.40A - White/White

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

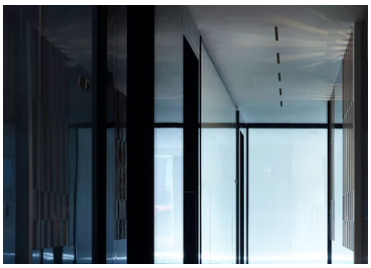



Main specifications

Number of heads	1	**Net lumen (lm)**	441
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	5.4W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	45
Beam angle C90-270 (°)	45



Luminous flux luminaire
441 lm (EXTREME CUT OFF)

Beam Angle: 45°

h(m)	E(lx)	D(m)
1	822	0.83
2	205	1.67
3	91	2.50
4	51	3.34
5	33	4.17

Electrical

Frequency (Hz)	50/60	**Insulation class**	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

Physical

Color	White/White	**Length (mm)**	79
Orientation	Adjustable		
Recessed depth (mm)	150		
Weight (kg)	0.25		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Adjustable No Trim 2 Spots Optic Wide Flood

Pre-installation Frame
08.0515.00

Accessory for mounting of No Trim continuous line.
08.0059.90