




Light Shadow Adjustable No Trim 4 Spots Optic Medium

03.9432.40A - White/Chrome

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

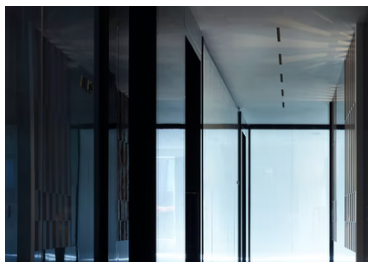


Main specifications

Number of heads	1	Net lumen (lm)	802
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	10.8W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	22
Beam angle C90-270 (°)	22



Beam Angle:	22°		
<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>	
1	5397	0.39	
2	1349	0.77	
3	600	1.16	
4	337	1.55	
5	216	1.94	

Luminous flux luminaire
802 lm (EXTREME CUT OFF)

Electrical

Frequency (Hz)	50/60	Insulation class II
Voltage (V)	220.00	
Dimmable	No	
Driver	Remote included	
Emergency	Without	

Physical

Color	White/Chrome	Length (mm)	149
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.34		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Adjustable No Trim 4 Spots Optic Medium



Accessory for mounting of No Trim
continuous line.
08.0059.90

Pre-installation Frame
08.0516.00