




03.8927.14A - Black/Gold

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

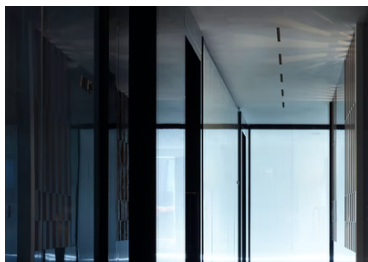

Number of heads	1	Net lumen (lm)	736
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	10.8W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10

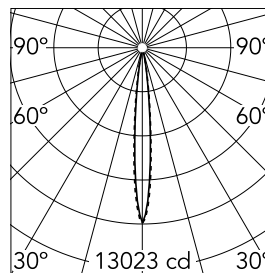

Luminous flux lumineire
736 lm (EXTREME CUT OFF)

Beam Angle:	10°		
	<u>h(m)</u>	<u>E(lx)</u>	<u>D(m)</u>
1	13023	0.18	
2	3256	0.36	
3	1447	0.55	
4	814	0.73	
5	521	0.91	

Frequency (Hz)	50/60	Insulation class II
Voltage (V)	220.00	
Dimmable	No	
Driver	Remote included	
Emergency	Without	

Color	Black/Gold	Length (mm)	149
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.34		
Tilt (°)	30		

It requires a pre-installation frame, to be ordered separately.

Light Shadow Adjustable No Trim 4 Spots Optic Spot



Pre-installation Frame
08.0516.00

Accessory for mounting of No Trim
continuous line.
08.0059.90