Light Shadow Adjustable No Trim 8 Spots Optic Flood

03.9448.40A - White/Gold

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

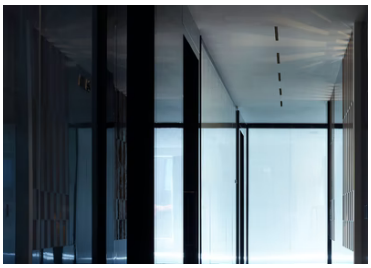



Main specifications

Number of heads	1	**Net lumen (lm)**	1765
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	21.6W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33



Luminous flux luminaire
1765 lm (EXTREME CUT OFF)

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	5433	0.60
2	1358	1.20
3	604	1.79
4	340	2.39
5	217	2.99

Electrical

Frequency (Hz)	50/60	**Insulation class**	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

Physical

Color	White/Gold	**Length (mm)**	289
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.50		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Adjustable No Trim 8 Spots Optic Flood

Accessory for mounting of No Trim continuous line.
08.0059.90

Pre-installation Frame
08.0517.00