




## Light Shadow Adjustable No Trim 8 Spots Optic Wide Flood

03.7366.14A - Black/White

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

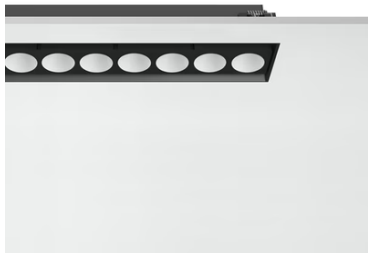


## Main specifications

Number of heads	1	Net lumen (lm)	1763
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	21.6W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

## Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	45
Beam angle C90-270 (°)	45

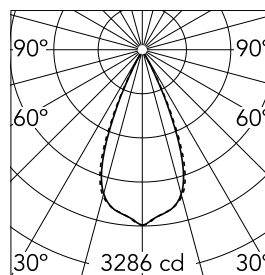

Beam Angle:	45°		
h(m)	E(lx)	D(m)	
1	3286	0.83	
2	822	1.67	
3	365	2.50	
4	205	3.34	
5	131	4.17	

Luminous flux luminaire  
1763 lm (EXTREME CUT OFF)

## Electrical

Frequency (Hz)	50/60	Insulation class II
Voltage (V)	220.00	
Dimmable	No	
Driver	Remote included	
Emergency	Without	

## Physical

Color	Black/White	Length (mm)	289
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.50		
Tilt (°)	30		

### Note

It requires a pre-installation frame, to be ordered separately.

# Light Shadow Adjustable No Trim 8 Spots Optic Wide Flood



---

Pre-installation Frame  
08.0517.00

---

Accessory for mounting of No Trim  
continuous line.  
08.0059.90