



Light Shadow Adjustable No Trim 8 Spots Optic Wide Flood

03.7373.14A - Black/Gold

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

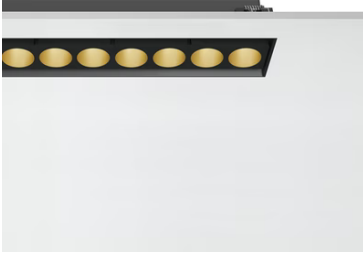


Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 1809 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 21.6W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|-------------------------------|------------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Wide flood |
| Beam angle (°) | 46 |
| Beam angle C90-270 (°) | 46 |

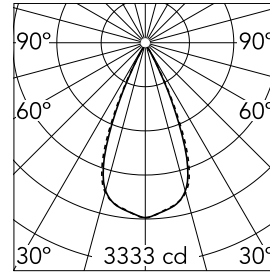

| | | | |
|--------------------|--------------|-------------|--|
| Beam Angle: | 46° | | |
| h(m) | E(lx) | D(m) | |
| 1 | 3333 | 0.84 | |
| 2 | 833 | 1.69 | |
| 3 | 370 | 2.53 | |
| 4 | 208 | 3.38 | |
| 5 | 133 | 4.22 | |

Luminous flux luminaire
1809 lm (EXTREME CUT OFF)

Electrical


| | | | |
|-----------------------|-----------------|-------------------------|----|
| Frequency (Hz) | 50/60 | Insulation class | II |
| Voltage (V) | 220.00 | | |
| Dimmable | No | | |
| Driver | Remote included | | |
| Emergency | Without | | |

Physical

| | | | |
|----------------------------|------------|--------------------|-----|
| Color | Black/Gold | Length (mm) | 289 |
| Orientation | Adjustable | | |
| Recessed depth (mm) | 75 | | |
| Weight (kg) | 0.50 | | |
| Tilt (°) | 30 | | |

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim 8 Spots Optic Wide Flood



Accessory for mounting of No Trim
continuous line.
08.0059.90

Pre-installation Frame
08.0517.00