



## Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Flood

03.9468.14ADA - Black/Gold

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

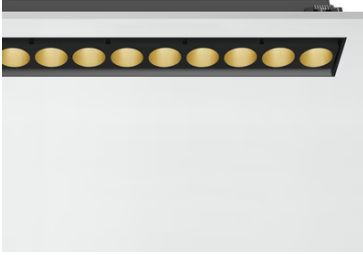


### Main specifications

Number of heads	1	Net lumen (lm)	2655
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33

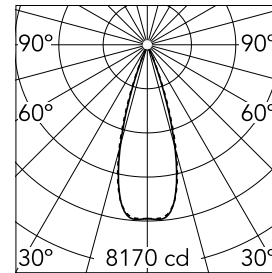

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	8170	0.60
2	2042	1.20
3	908	1.79
4	511	2.39
5	327	2.99

Luminous flux luminaire  
2655 lm (EXTREME CUT OFF)

### Electrical


Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

### Physical

Color	Black/Gold	Length (mm)	429
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.66		
Tilt (°)	30		

### Note

It requires a pre-installation frame, to be ordered separately.



# Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Flood



---

Accessory for mounting of No Trim  
continuous line.  
08.0059.90

---

Pre-installation Frame  
08.0518.00