



## Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Medium

03.9472.14ADA - Black/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

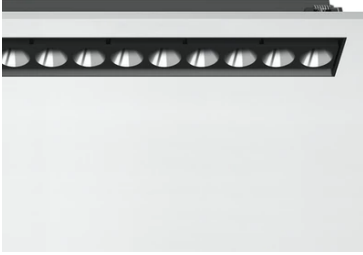


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	2878
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	32.4W	<b>Environment</b>	Indoor
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Medium
<b>Beam angle (°)</b>	22
<b>Beam angle C90-270 (°)</b>	22

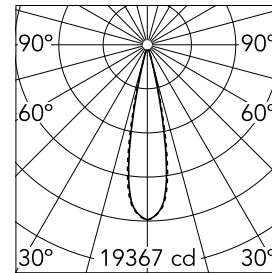

Beam Angle: 22°

	h(m)	E(lx)	D(m)
1	19367	0.39	
2	4842	0.77	
3	2152	1.16	
4	1210	1.55	
5	775	1.94	

Luminous flux luminaire  
2878 lm (EXTREME CUT OFF)

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	220.00	<b>Insulation class</b>	II
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote		
<b>Driver type</b>	Electronic dimmable push, Electronic dimmable DALI		

### Physical

<b>Color</b>	Black/Chrome	<b>Length (mm)</b>	429
<b>Orientation</b>	Adjustable		
<b>Recessed depth (mm)</b>	75		
<b>Weight (kg)</b>	0.66		
<b>Tilt (°)</b>	30		

### Note

It requires a pre-installation frame, to be ordered separately.



## Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Medium



---

Accessory for mounting of No Trim  
continuous line.  
08.0059.90

---

Pre-installation Frame  
08.0518.00