



### Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Medium

03.9472.14ADA - Black/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

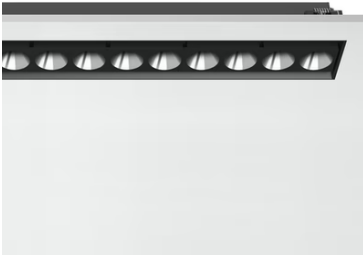


#### Main specifications

Number of heads	1	Net lumen (lm)	2878
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

#### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	22
Beam angle C90-270 (°)	22

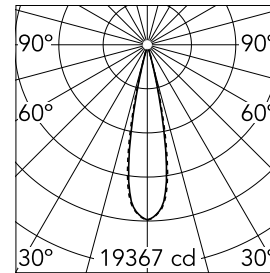

Beam Angle:		22°
h(m)	E(lx)	D(m)
1	19367	0.39
2	4842	0.77
3	2152	1.16
4	1210	1.55
5	775	1.94

Luminous flux luminaire  
2878 lm (EXTREME CUT OFF)

#### Electrical


Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

#### Physical

Color	Black/Chrome	Length (mm)	429
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.66		
Tilt (°)	30		

#### Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Medium



Pre-installation Frame  
08.0518.00

Accessory for mounting of No Trim  
continuous line.  
08.0059.90