



## Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Spot

03.8946.14ADA - Black/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

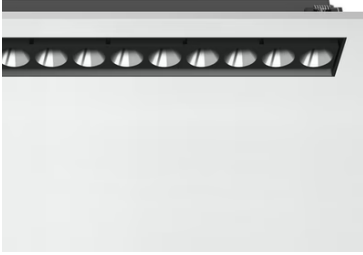


### Main specifications

Number of heads	1	Net lumen (lm)	2888
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10

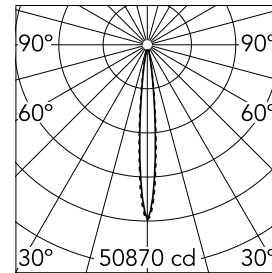

Beam Angle: 10°

h(m)	E(lx)	D(m)
1	50870	0.18
2	12718	0.36
3	5652	0.55
4	3179	0.73
5	2035	0.91

Luminous flux luminaire  
2888 lm (EXTREME CUT OFF)

### Electrical


Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

### Physical

Color	Black/Chrome	Length (mm)	429
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.66		
Tilt (°)	30		

### Note

It requires a pre-installation frame, to be ordered separately.



# Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Spot



Pre-installation Frame  
08.0518.00

Accessory for mounting of No Trim  
continuous line.  
08.0059.90