


03.8946.40ADA - White/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

Number of heads	1	Net lumen (lm)	2888
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10


$$h(m) \quad E(lx) \quad D(m)$$





1	50870	0.18
2	12718	0.36
3	5652	0.55
4	3179	0.73
5	2035	0.91

Luminous flux luminaire
2888 lm (EXTREME CUT OFF)

Frequency (Hz)	50/60	Emergency Insulation class	Without II
Voltage (V)	220.00		
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

Color	White/Chrome	Length (mm)	429
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.66		
Tilt (°)	30		

It requires a pre-installation frame, to be ordered separately.

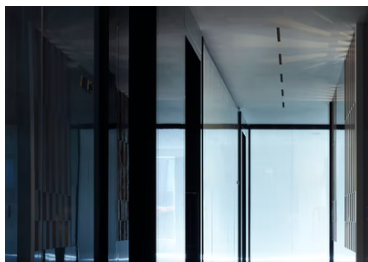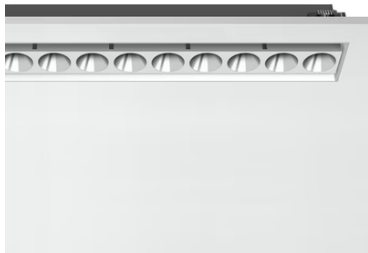

Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Spot



Pre-installation Frame
08.0518.00

Accessory for mounting of No Trim
continuous line.
08.0059.90