


Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Spot

03.8947.40ADA - White/Gold

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

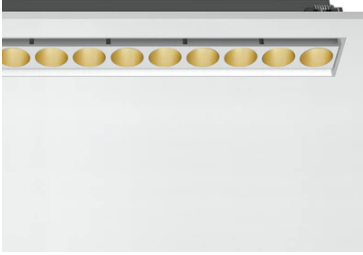


Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 2817 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 32.4W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical


| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 10 |
| Beam angle C90-270 (°) | 10 |

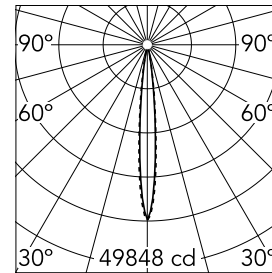

Beam Angle: 10°

| | h(m) | E(lx) | D(m) |
|---|-------|-------|------|
| 1 | 49848 | 0.18 | |
| 2 | 12462 | 0.36 | |
| 3 | 5539 | 0.55 | |
| 4 | 3116 | 0.73 | |
| 5 | 1994 | 0.91 | |

Luminous flux luminaire
2817 lm (EXTREME CUT OFF)



Electrical


| | | | |
|-----------------------|-----------------|-------------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 220.00 | Insulation class | II |
| Dimmable | Yes | | |
| Driver | Remote included | | |
| Driver type | Dimmable DALI | | |
| | 1 | | |

Physical

| | | | |
|----------------------------|------------|--------------------|-----|
| Color | White/Gold | Length (mm) | 429 |
| Orientation | Adjustable | | |
| Recessed depth (mm) | 75 | | |
| Weight (kg) | 0.66 | | |
| Tilt (°) | 30 | | |

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Spot



Pre-installation Frame
08.0518.00



Accessory for mounting of No Trim
continuous line.
08.0059.90