



Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Wide Flood

■ ■ 03.7375.14ADA - Black/Black

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

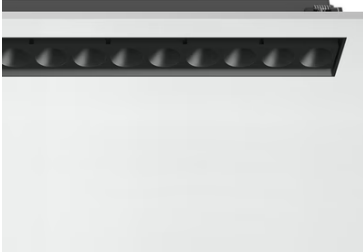


Main specifications

Number of heads	1	Net lumen (lm)	2666
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	46
Beam angle C90-270 (°)	46

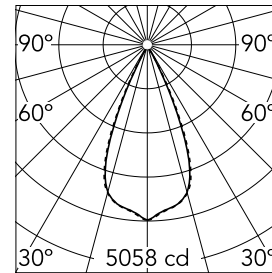

Beam Angle:	46°		
	h(m)	E(lx)	D(m)
1	5058	0.84	
2	1264	1.69	
3	562	2.53	
4	316	3.38	
5	202	4.22	

Luminous flux luminaire
2666 lm (EXTREME CUT OFF)

Electrical


Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

Physical

Color	Black/Black	Length (mm)	429
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.66		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Wide Flood



Pre-installation Frame
08.0518.00

Accessory for mounting of No Trim
continuous line.
08.0059.90