


Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Wide Flood

03.7376.40ADA - White/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

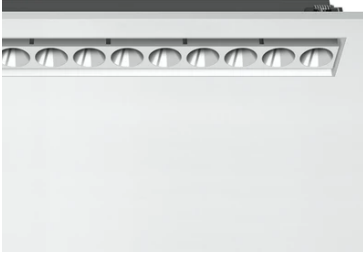


Main specifications

Number of heads	1	Net lumen (lm)	2681
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor
CCT (K)	2700K		
CRI	90		


Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	44
Beam angle C90-270 (°)	44

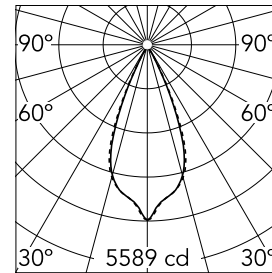

Beam Angle:	44°		
	h(m)	E(lx)	D(m)
	1	5589	0.80
	2	1397	1.60
	3	621	2.40
	4	349	3.19
	5	224	3.99

Luminous flux luminaire
2681 lm (EXTREME CUT OFF)



Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote		
Driver type	Electronic dimmable push, Electronic dimmable DALI		

Physical

Color	White/Chrome	Length (mm)	429
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.66		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim Dali Version 12 Spots Optic Wide Flood



Accessory for mounting of No Trim
continuous line.
08.0059.90

Pre-installation Frame
08.0518.00