Light Shadow Adjustable No Trim Dali Version 2 Spots Optic Flood

03.9406.40ADA - White/Black

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

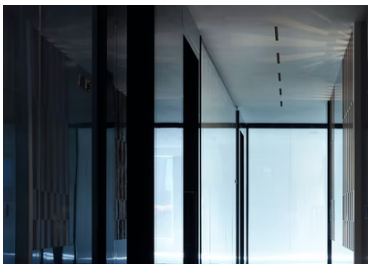



Main specifications

Number of heads	1	**Net lumen (lm)**	434
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	5.4W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33



Luminous flux luminaire
434 lm (EXTREME CUT OFF)

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	1357	0.60
2	339	1.19
3	151	1.79
4	85	2.39
5	54	2.99

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220.00	**Insulation class**	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI 1		

Physical

Color	White/Black	**Length (mm)**	79
Orientation	Adjustable		
Recessed depth (mm)	150		
Weight (kg)	0.25		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Adjustable No Trim Dali Version 2 Spots Optic Flood

Pre-installation Frame
08.0515.00

Accessory for mounting of No Trim continuous line.
08.0059.90