



Light Shadow Adjustable No Trim Dali Version 2 Spots Optic Medium

03.9412.40ADA - White/Chrome

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

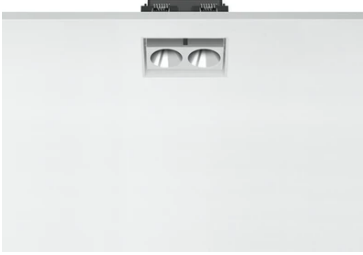


Main specifications

| | | | |
|------------------------|-------|-----------------------|------------------|
| Number of heads | 1 | Net lumen (lm) | 475 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 5.4W | Environment | Indoor |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Medium |
| Beam angle (°) | 22 |
| Beam angle C90-270 (°) | 22 |

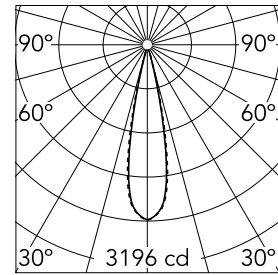

| Beam Angle: 22° | | |
|-----------------|-------|------|
| h(m) | E(lx) | D(m) |
| 1 | 3196 | 0.39 |
| 2 | 799 | 0.77 |
| 3 | 355 | 1.16 |
| 4 | 200 | 1.55 |
| 5 | 128 | 1.94 |

Luminous flux luminaire
475 lm (EXTREME CUT OFF)

Electrical


| | | | |
|-----------------------|--------------------------|-------------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 220.00 | Insulation class | II |
| Dimmable | Yes | | |
| Driver | Remote | | |
| Driver type | Electronic dimmable DALI | | |

Physical

| | | | |
|----------------------------|--------------|--------------------|----|
| Color | White/Chrome | Length (mm) | 79 |
| Orientation | Adjustable | | |
| Recessed depth (mm) | 150 | | |
| Weight (kg) | 0.25 | | |
| Tilt (°) | 30 | | |

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Adjustable No Trim Dali Version 2 Spots Optic Medium



Accessory for mounting of No Trim
continuous line.
08.0059.90

Pre-installation Frame
08.0515.00