# Light Shadow Adjustable No Trim Dali Version 4 Spots Optic Flood

**03.9428.14ADA - Black/Gold**

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

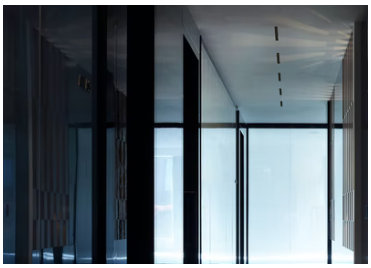




## Main specifications

| | | | |
|---|---|---|---|
| **Number of heads** | 1 | **Net lumen (lm)** | 732 |
| **Lamp category** | LED | **Mountings** | Ceiling recessed |
| **Power (W)** | 10.8W | **Environment** | Indoor dry location |
| **CCT (K)** | 2700K | | |
| **CRI** | 90 | | |

## Optical

| | |
|---|---|
| **Lighting type** | Direct |
| **LED type** | Power LED |
| **Light distribution** | Symmetric |
| **Optical type** | Flood |
| **Beam angle (°)** | 33 |
| **Beam angle C90-270 (°)** | 33 |




Luminous flux luminaire
732 lm (EXTREME CUT OFF)

Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|---|---|---|
| 1 | 2253 | 0.60 |
| 2 | 563 | 1.20 |
| 3 | 250 | 1.79 |
| 4 | 141 | 2.39 |
| 5 | 90 | 2.99 |

## Electrical

| | | | |
|---|---|---|---|
| **Frequency (Hz)** | 50/60 | **Emergency** | Without |
| **Voltage (V)** | 220.00 | **Insulation class** | II |
| **Dimmable** | Yes | | |
| **Driver** | Remote included | | |
| **Driver type** | Dimmable DALI<br>1 | | |

## Physical

| | | | |
|---|---|---|---|
| **Color** | Black/Gold | **Length (mm)** | 149 |
| **Orientation** | Adjustable | | |
| **Recessed depth (mm)** | 75 | | |
| **Weight (kg)** | 0.34 | | |
| **Tilt (°)** | 30 | | |

## Note

It requires a pre-installation frame, to be ordered separately.

# Light Shadow Adjustable No Trim Dali Version 4 Spots Optic Flood

Accessory for mounting of No Trim continuous line.
08.0059.90

Pre-installation Frame
08.0516.00