Light Shadow Adjustable No Trim Dali Version 8 Spots Optic Wide Flood

03.7371.40ADA - White/Black

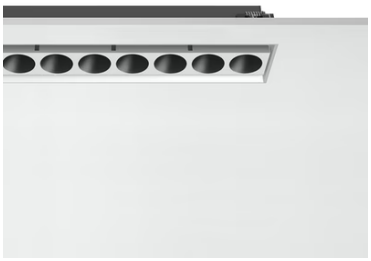

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

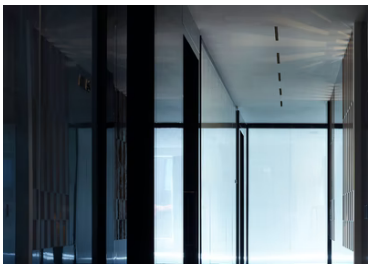



Main specifications

Number of heads	1	**Net lumen (lm)**	1858
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	21.6W	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	46
Beam angle C90-270 (°)	46



Luminous flux luminaire
1858 lm (EXTREME CUT OFF)

Beam Angle: 46°

h(m)	E(lx)	D(m)
1	3523	0.84
2	881	1.69
3	391	2.53
4	220	3.38
5	141	4.22

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220.00	**Insulation class**	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI 1		

Physical

Color	White/Black	**Length (mm)**	289
Orientation	Adjustable		
Recessed depth (mm)	75		
Weight (kg)	0.50		
Tilt (°)	30		

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Adjustable No Trim Dali Version 8 Spots Optic Wide Flood

Accessory for mounting of No Trim continuous line.
08.0059.90

Pre-installation Frame
08.0517.00