



## Light Shadow Adjustable Trim 12 Spots Optic Flood

03.9365.40A - White/White

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

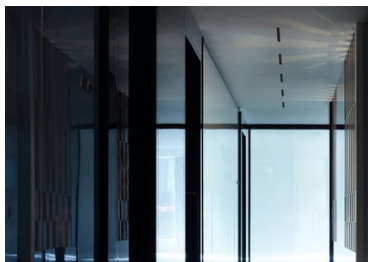


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 2687                |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 32.4W | Environment    | Indoor dry location |
| CCT (K)         | 2700K |                |                     |
| CRI             | 90    |                |                     |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Flood     |
| Beam angle (°)         | 33        |
| Beam angle C90-270 (°) | 33        |



Beam Angle: 33°

|   | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 8376 | 0.59  |      |
| 2 | 2094 | 1.18  |      |
| 3 | 931  | 1.78  |      |
| 4 | 523  | 2.37  |      |
| 5 | 335  | 2.96  |      |

Luminous flux luminaire  
2687 lm (EXTREME CUT OFF)

### Electrical

|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

### Physical

|                     |             |             |     |
|---------------------|-------------|-------------|-----|
| Color               | White/White | Tilt (°)    | 30  |
| Orientation         | Adjustable  | Length (mm) | 436 |
| Trim                | yes         |             |     |
| Recessed depth (mm) | 75          |             |     |
| Weight (kg)         | 0.66        |             |     |

### Note

Pre-Installation frame not required.

