





03.8914.14A - Black/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

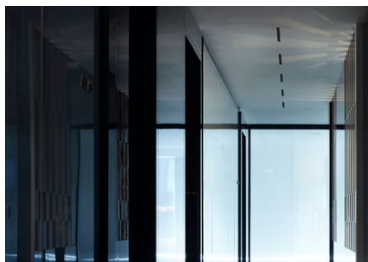

Number of heads	1	Net lumen (lm)	2888
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	32.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10

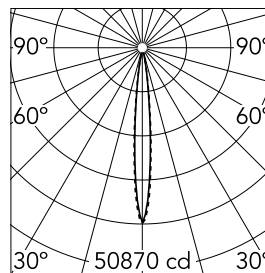

Beam Angle: 10°

h(m)	E(lx)	D(m)
1	50870	0.18
2	12718	0.36
3	5652	0.55
4	3179	0.73
5	2035	0.91

Luminous flux lumineuse
2888 lm (EXTREME CUT OFF)

Frequency (Hz)	50/60	Insulation class II
Voltage (V)	220.00	
Dimmable	No	
Driver	Remote included	
Emergency	Without	

Color	Black/Chrome	Tilt (°)	30
Orientation	Adjustable	Length (mm)	436
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.66		

Pre-Installation frame not required.