





03.8887.40A - White/Gold

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

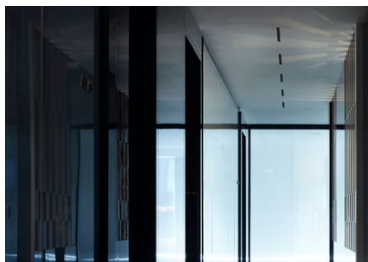

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 444 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 5.4W | Environment | Indoor dry location |
| CCT (K) | 2700K | | |
| CRI | 90 | | |

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 10 |
| Beam angle C90-270 (°) | 10 |

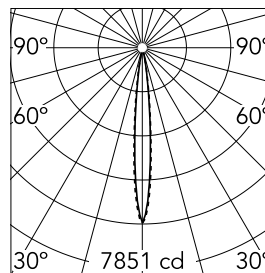

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 7851 | 0.18 |
| 2 | 1963 | 0.36 |
| 3 | 872 | 0.55 |
| 4 | 491 | 0.73 |
| 5 | 314 | 0.91 |

Luminous flux lumineuse
444 lm (EXTREME CUT OFF)

| | | |
|----------------|-----------------|---------------------|
| Frequency (Hz) | 50/60 | Insulation class II |
| Voltage (V) | 220.00 | |
| Dimmable | No | |
| Driver | Remote included | |
| Emergency | Without | |

| | | | |
|---------------------|------------|-------------|----|
| Color | White/Gold | Tilt (°) | 30 |
| Orientation | Adjustable | Length (mm) | 86 |
| Trim | yes | | |
| Recessed depth (mm) | 150 | | |
| Weight (kg) | 0.25 | | |

Pre-Installation frame not required.