





03.8899.14A - Black/Gold

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

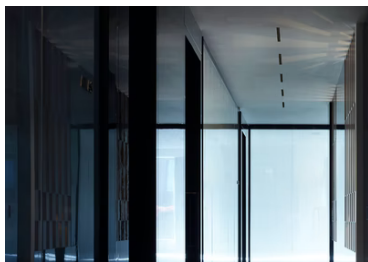

Number of heads	1	Net lumen (lm)	785
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	10.8W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10



Luminous flux lumineuse
785 lm (EXTREME CUT OFF)

Beam Angle:	10°	
h(m)	E(lx)	D(m)
1	13891	0.18
2	3473	0.36
3	1543	0.55
4	868	0.73
5	556	0.91

Frequency (Hz)	50/60
Voltage (V)	220.00
Dimmable	No
Driver	Remote included
Emergency	Without

Insulation class ||

Color	Black/Gold	Tilt (°)	30
Orientation	Adjustable	Length (mm)	156
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.34		

Tilt (°)	30
Length (mm)	156

Pre-Installation frame not required.