





03.7312.14A - Black/White

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

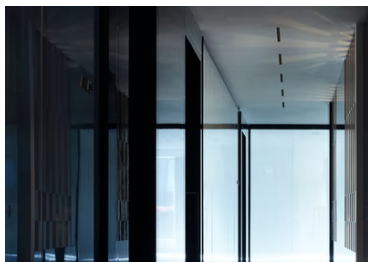

Number of heads	1	Net lumen (lm)	780
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	10.8W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	45
Beam angle C90-270 (°)	45



Beam Angle: 45°

h(m)	E(lx)	D(m)
1	1454	0.83
2	363	1.67
3	162	2.50
4	91	3.34
5	58	4.17

Luminous flux luminaire
780 lm (EXTREME CUT OFF)

Frequency (Hz)	50/60	Insulation class	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

Color	Black/White	Tilt (°)	30
Orientation	Adjustable	Length (mm)	156
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.34		

Pre-Installation frame not required.