Light Shadow Adjustable Trim 8 Spots Optic Wide Flood

03.7318.14A - Black/Chrome

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

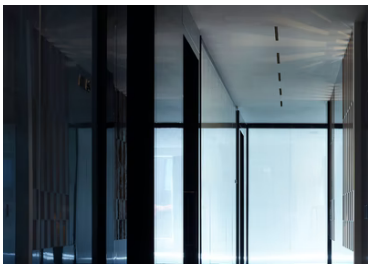



Main specifications

Number of heads	1	**Net lumen (lm)**	1783
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	21.6W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	44
Beam angle C90-270 (°)	44



Luminous flux luminaire
1783 lm (EXTREME CUT OFF)

Beam Angle: 44°

h(m)	E(lx)	D(m)
1	3717	0.80
2	929	1.60
3	413	2.40
4	232	3.19
5	149	3.99

Electrical

Frequency (Hz)	50/60	**Insulation class**	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

Physical

Color	Black/Chrome	**Tilt (°)**	30
Orientation	Adjustable	**Length (mm)**	296
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.50		

Note

Pre-Installation frame not required.