Light Shadow Adjustable Trim Dali Version 12 Spots Optic Flood

03.9366.14ADA - Black/Black

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

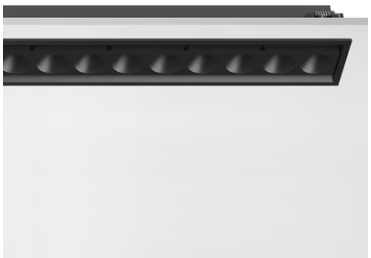

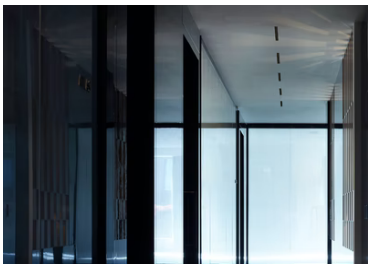



Main specifications

Number of heads	1	**Net lumen (lm)**	2610
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	32.4W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33



Luminous flux luminaire
2610 lm (EXTREME CUT OFF)

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	8160	0.60
2	2040	1.19
3	907	1.79
4	510	2.39
5	326	2.99

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220.00	**Insulation class**	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI 1		

Physical

Color	Black/Black	**Tilt (°)**	30
Orientation	Adjustable	**Length (mm)**	436
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.66		

Note

Pre-Installation frame not required.