Light Shadow Adjustable Trim Dali Version 2 Spots Optic Flood

03.9305.14ADA - Black/White

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

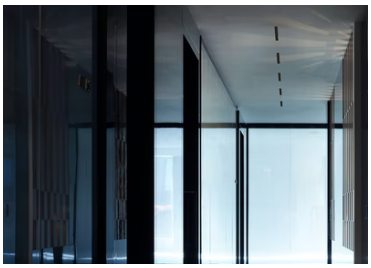



Main specifications

Number of heads	1	**Net lumen (lm)**	447
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	5.4W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33



Luminous flux luminaire
447 lm (EXTREME CUT OFF)

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	1392	0.59
2	348	1.18
3	155	1.78
4	87	2.37
5	56	2.96

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220.00	**Insulation class**	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI 1		

Physical

Color	Black/White	**Tilt (°)**	30
Orientation	Adjustable	**Length (mm)**	86
Trim	yes		
Recessed depth (mm)	150		
Weight (kg)	0.25		

Note

Pre-Installation frame not required.