





03.8890.14ADA - Black/Chrome

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

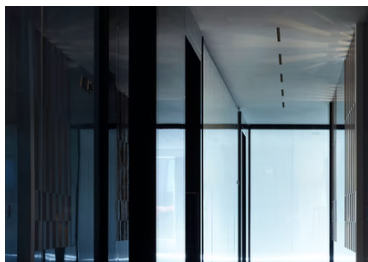

Number of heads	1	Net lumen (lm)	477
Lamp category	LED	Mountings	Ceiling recessed
Power (W)	5.4W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10



Beam Angle: 10°

h(m)	E(lx)	D(m)
1	8394	0.18
2	2098	0.36
3	933	0.55
4	525	0.73
5	336	0.91

Luminous flux lumineuse
477 lm (EXTREME CUT OFF)

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	220.00	Insulation class	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI		
	1		

Color	Black/Chrome	Tilt (°)	30
Orientation	Adjustable	Length (mm)	86
Trim	yes		
Recessed depth (mm)	150		
Weight (kg)	0.25		

Pre-Installation frame not required.