



## Light Shadow Adjustable Trim Dali Version 2 Spots Optic Wide Flood

03.7306.40ADA - White/Chrome

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

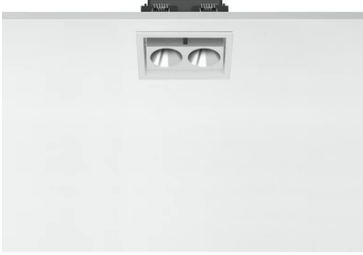


### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	467
<b>Lamp category</b>	LED	<b>Mountings</b>	Ceiling recessed
<b>Power (W)</b>	5.4W	<b>Environment</b>	Indoor
<b>CCT (K)</b>	3000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Wide flood
<b>Beam angle (°)</b>	44
<b>Beam angle C90-270 (°)</b>	44

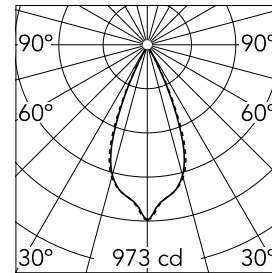

<b>Beam Angle:</b>	44°		
	<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>
	1	973	0.80
	2	243	1.60
	3	108	2.40
	4	61	3.19
	5	39	3.99

Luminous flux luminaire  
467 lm (EXTREME CUT OFF)

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	220.00	<b>Insulation class</b>	II
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote		
<b>Driver type</b>	Electronic dimmable DALI		

### Physical

<b>Color</b>	White/Chrome	<b>Tilt (°)</b>	30
<b>Orientation</b>	Adjustable	<b>Length (mm)</b>	86
<b>Trim</b>	yes		
<b>Recessed depth (mm)</b>	150		
<b>Weight (kg)</b>	0.25		

### Note

Pre-Installation frame not required.

### Certification / Marking

