



Light Shadow Adjustable Trim Dali Version 8 Spots Optic Medium

■ 03.9350.14ADA - Black/White

Recessed integrated luminaire with 8 LED lighting spots. Remote power supply included (220-240V).

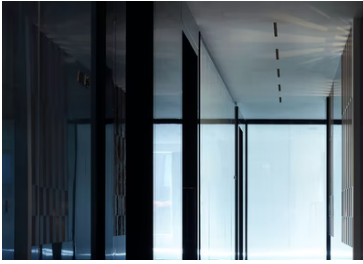


Main specifications

| | | | |
|------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 1878 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 21.6W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Medium |
| Beam angle (°) | 22 |
| Beam angle C90-270 (°) | 22 |

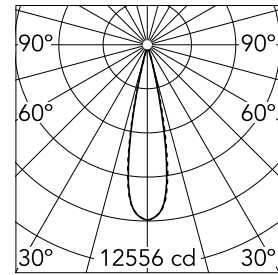

| | | | |
|--------------------|-------------|--------------|-------------|
| Beam Angle: | 22° | | |
| | h(m) | E(lx) | D(m) |
| 1 | 12556 | 0.39 | |
| 2 | 3139 | 0.78 | |
| 3 | 1395 | 1.17 | |
| 4 | 785 | 1.56 | |
| 5 | 502 | 1.95 | |

Luminous flux luminaire
1878 lm (EXTREME CUT OFF)

Electrical

| | | | |
|-----------------------|-----------------|-------------------------|---------|
| Frequency (Hz) | 50/60 | Emergency | Without |
| Voltage (V) | 220.00 | Insulation class | II |
| Dimmable | Yes | | |
| Driver | Remote included | | |
| Driver type | Dimmable DALI | | |
| | 1 | | |

Physical

| | | | |
|----------------------------|-------------|--------------------|-----|
| Color | Black/White | Tilt (°) | 30 |
| Orientation | Adjustable | Length (mm) | 296 |
| Trim | yes | | |
| Recessed depth (mm) | 75 | | |
| Weight (kg) | 0.50 | | |

Note

Pre-Installation frame not required.

