

Light Shadow DOTS - Single Spot Module. Set of 4 Spots**■ 03.8636.14A - Black**


LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Available in one-light versions and groups of two and four lights. Driver not included, the driver has to be directly connected to the embedding frames.

**Main specifications**

Number of heads	4	Net lumen (lm)	784
Lamp category	LED	Mountings	Recessed
Power (W)	10.8W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	46
Beam angle C90-270 (°)	46



Beam Angle: 46°

h(m)	E(lx)	D(m)
------	-------	------

1	1488	0.84
---	------	------


2	372	1.69
---	-----	------

3	165	2.53
---	-----	------

4	93	3.38
---	----	------

5	60	4.22
---	----	------


Luminous flux luminaire
784 lm

**Electrical**


Voltage (V)	4x3	Emergency	Without
Current (mA)	900	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable 0-10V, Dimmable Casambi, Dimmable DALI 1		

Physical

Color	Black
Orientation	Fixed
Recessed depth (mm)	75
Weight (kg)	0.20
Spot diameter (mm)	32.5



Light Shadow DOTS - Single Spot Module. Set of 4 Spots

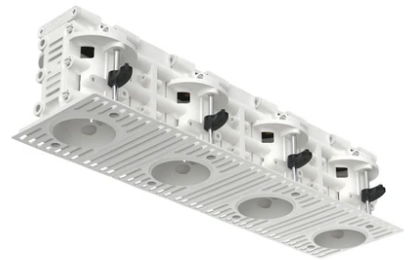

Continuous current power supply
220/240V – 50/60Hz. Adjustable Current
300mA-13W / 350mA-15W / 400mA-18W
/ 450mA-20W / 500mA-22W / 550mA-
24W / 600mA-27W / 650mA-29W /
700mA-31W / 750mA-32W / 800mA-33W
/ 850mA-35W / 900mA-38W / 950mA-
40W / 1000/1050mA-42W
60.9162

Pre-installation frame. 4L – int 43
08.0582.00

Pre-installation frame. 4L – int 70
08.0584.00



Non dimmable continuous current
power supply of 20W, dimmable 0-10V,
220/240V – 50/60Hz
60.9414

Continuous current power supply,
dimmable Casambi 220/240V-50/60Hz,
300mA-16W / 350mA-18,5W / 400mA-
21,5W / 450mA-24W / 500mA-27W /
600mA-32W / 650mA-35W / 700mA-36W
/750/800/900/1000/1050mA – 38W
60.9207

70 mm divider to keep the spacing
between spots when putting together
70 mm modules
08.0586.00



Non dimmable continuous current
power supply of 15-20W, 110/240V –
50/60Hz, with power current selected
through adjustable 350 mA-15W /500
mA/ /550 / 700 / 850 mA / 900 mA – 20W
switch
60.8911