


Light Shadow Fixed No Trim 12 Spots Optic Flood

03.9275.40A - White/White

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).




Main specifications

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 2836 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 32.4W | Environment | Indoor dry location |
| CCT (K) | 3000K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Flood |
| Beam angle (°) | 33 |
| Beam angle C90-270 (°) | 33 |

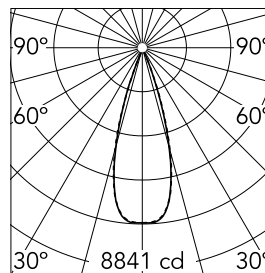

Beam Angle: 33°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 8841 | 0.59 |
| 2 | 2210 | 1.18 |
| 3 | 982 | 1.78 |
| 4 | 553 | 2.37 |
| 5 | 354 | 2.96 |

Luminous flux luminaire
2836 lm (EXTREME CUT OFF)

Electrical

| | | | |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60 | Insulation class | II |
| Voltage (V) | 220.00 | | |
| Dimmable | No | | |
| Driver | Remote included | | |
| Emergency | Without | | |

Physical


| | |
|---------------------|-------------|
| Color | White/White |
| Orientation | Fixed |
| Recessed depth (mm) | 75 |
| Weight (kg) | 0.66 |
| Length (mm) | 420 |

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Fixed No Trim 12 Spots Optic Flood

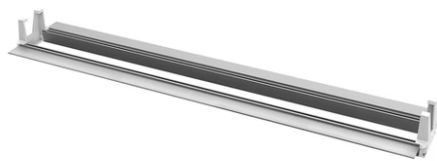

Pre-installation Frame
08.0513.00

Accessory for mounting of No Trim
continuous line.
08.0052.90