Light Shadow Fixed No Trim 12 Spots Optic Flood

03.9278.14A - Black/Gold

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

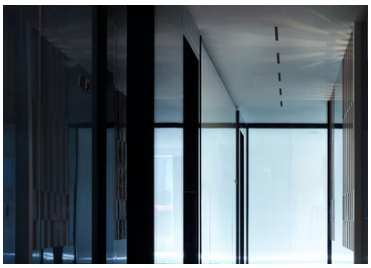



Main specifications

Number of heads	1	**Net lumen (lm)**	2802
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	32.4W	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	33
Beam angle C90-270 (°)	33



Luminous flux luminaire
2802 lm (EXTREME CUT OFF)

Beam Angle: 33°

h(m)	E(lx)	D(m)
1	8623	0.60
2	2156	1.20
3	958	1.79
4	539	2.39
5	345	2.99

Electrical

Frequency (Hz)	50/60	**Insulation class**	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

Physical

Color	Black/Gold
Orientation	Fixed
Recessed depth (mm)	75
Weight (kg)	0.66
Length (mm)	420

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Fixed No Trim 12 Spots Optic Flood

Accessory for mounting of No Trim continuous line.
08.0052.90

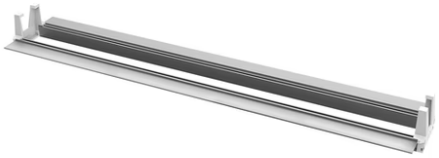

Pre-installation Frame
08.0513.00