



Light Shadow Fixed No Trim 12 Spots Optic Medium

■ 03.9260.14A - Black/White

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

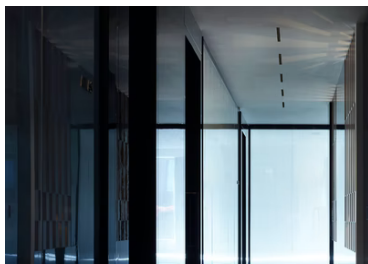


Main specifications

| | | | |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1 | Net lumen (lm) | 2696 |
| Lamp category | LED | Mountings | Ceiling recessed |
| Power (W) | 32.4W | Environment | Indoor dry location |
| CCT (K) | 2700K | | |
| CRI | 90 | | |

Optical

| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Medium |
| Beam angle (°) | 22 |
| Beam angle C90-270 (°) | 22 |

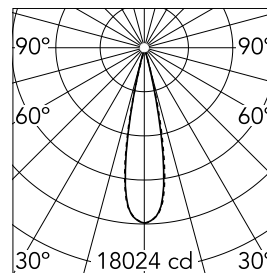

Beam Angle: 22°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 18024 | 0.39 |
| 2 | 4506 | 0.78 |
| 3 | 2003 | 1.17 |
| 4 | 1126 | 1.56 |
| 5 | 721 | 1.95 |

Luminous flux luminaire
2696 lm (EXTREME CUT OFF)

Electrical

| | | | |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60 | Insulation class | II |
| Voltage (V) | 220.00 | | |
| Dimmable | No | | |
| Driver | Remote included | | |
| Emergency | Without | | |

Physical

| | |
|---------------------|-------------|
| Color | Black/White |
| Orientation | Fixed |
| Recessed depth (mm) | 75 |
| Weight (kg) | 0.66 |
| Length (mm) | 420 |

Note

It requires a pre-installation frame, to be ordered separately.



Light Shadow Fixed No Trim 12 Spots Optic Medium



Accessory for mounting of No Trim
continuous line.
08.0052.90

Pre-installation Frame
08.0513.00