Light Shadow Fixed No Trim 12 Spots Optic Wide Flood

03.8380.40A - White/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

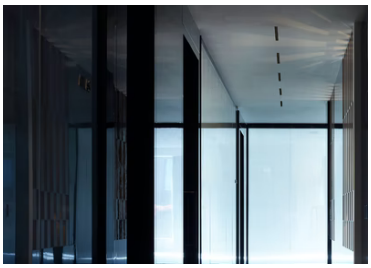



Main specifications

Number of heads	1	**Net lumen (lm)**	2830
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	32.4W	**Environment**	Indoor dry location
CCT (K)	3000K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Wide flood
Beam angle (°)	44
Beam angle C90-270 (°)	44



Luminous flux luminaire
2830 lm (EXTREME CUT OFF)

Beam Angle: 44°

h(m)	E(lx)	D(m)
1	5900	0.80
2	1475	1.60
3	656	2.40
4	369	3.19
5	236	3.99

Electrical

Frequency (Hz)	50/60	**Insulation class**	II
Voltage (V)	220.00		
Dimmable	No		
Driver	Remote included		
Emergency	Without		

Physical

Color	White/Chrome
Orientation	Fixed
Recessed depth (mm)	75
Weight (kg)	0.66
Length (mm)	420

Note

It requires a pre-installation frame, to be ordered separately.

Light Shadow Fixed No Trim 12 Spots Optic Wide Flood

Accessory for mounting of No Trim continuous line.
08.0052.90

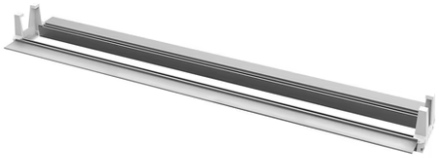

Pre-installation Frame
08.0513.00