



## Light Shadow Fixed No Trim 2 Spots Optic Wide Flood

03.8352.14A - Black/Chrome

Recessed integrated luminaire with 2 LED lighting spots. Remote power supply included (220-240V).

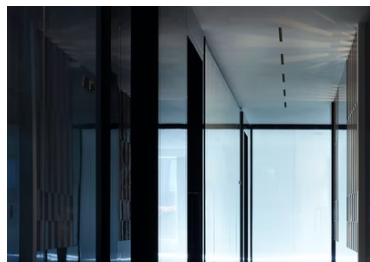


### Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 446                 |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 5.4W  | Environment    | Indoor dry location |
| CCT (K)         | 2700K |                |                     |
| CRI             | 90    |                |                     |

### Optical

|                        |            |
|------------------------|------------|
| Lighting type          | Direct     |
| LED type               | Power LED  |
| Light distribution     | Symmetric  |
| Optical type           | Wide flood |
| Beam angle (°)         | 44         |
| Beam angle C90-270 (°) | 44         |



Beam Angle: 44°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 929   | 0.80 |
| 2    | 232   | 1.60 |
| 3    | 103   | 2.40 |
| 4    | 58    | 3.19 |
| 5    | 37    | 3.99 |

Luminous flux luminaire  
446 lm (EXTREME CUT OFF)

### Electrical

|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

### Physical


|                     |              |
|---------------------|--------------|
| Color               | Black/Chrome |
| Orientation         | Fixed        |
| Recessed depth (mm) | 150          |
| Weight (kg)         | 0.25         |
| Length (mm)         | 70           |

### Note

It requires a pre-installation frame, to be ordered separately.



# Light Shadow Fixed No Trim 2 Spots Optic Wide Flood



Accessory for mounting of No Trim  
continuous line.  
08.0052.90

Pre-installation Frame  
08.0510.00